



# Poolmax





## Cable












**ubbink**

[www.ubbinkgarden.com](http://www.ubbinkgarden.com)



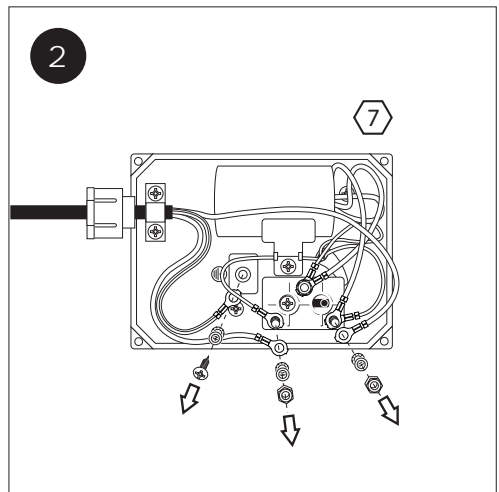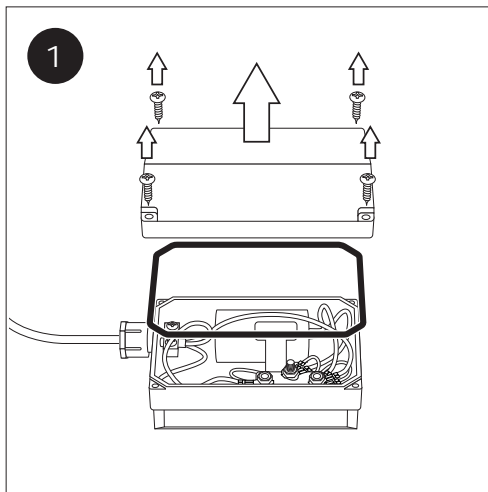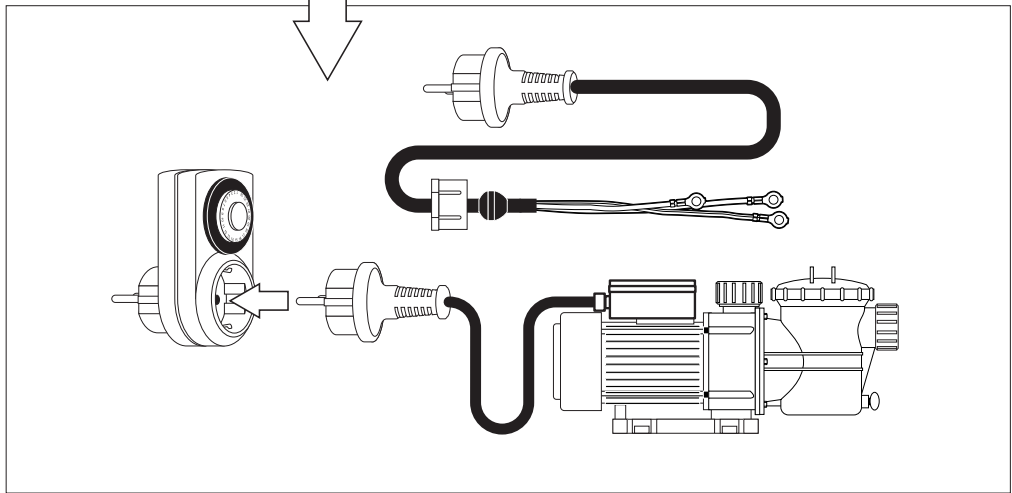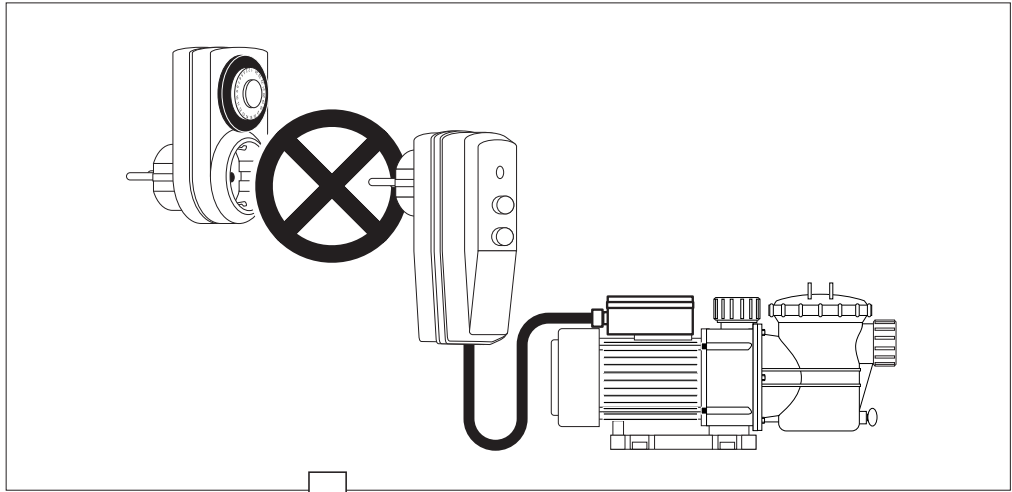

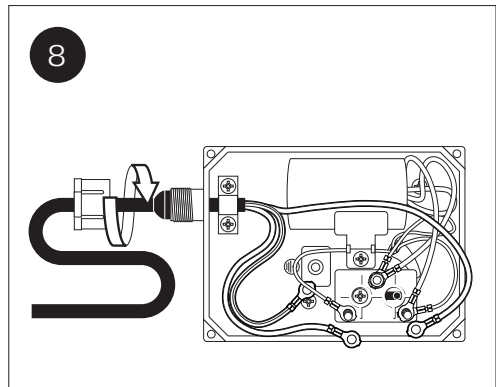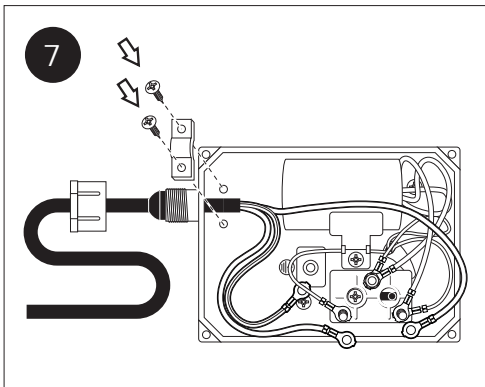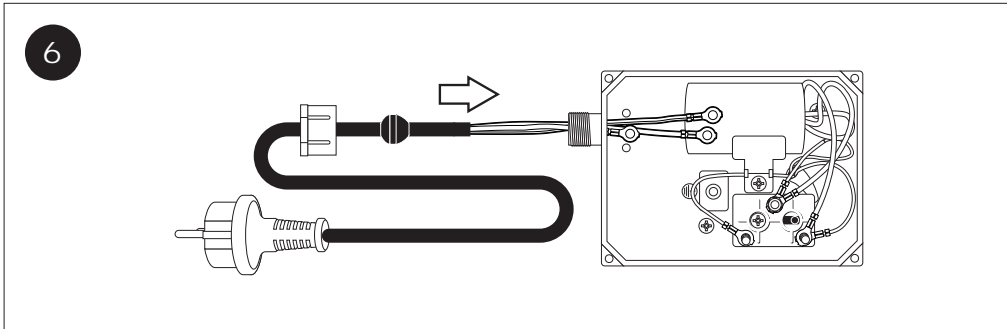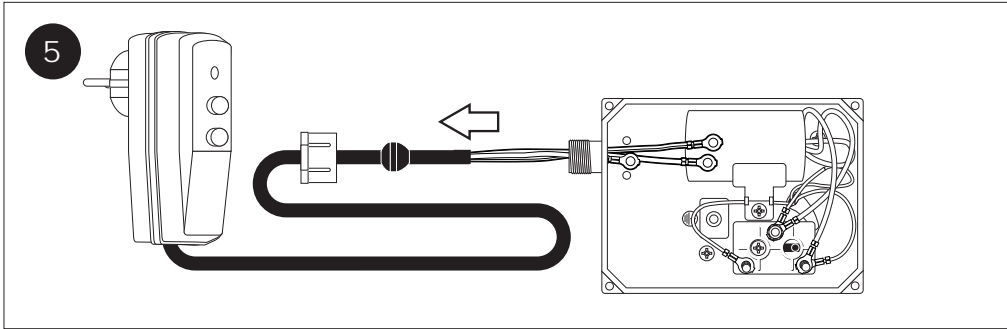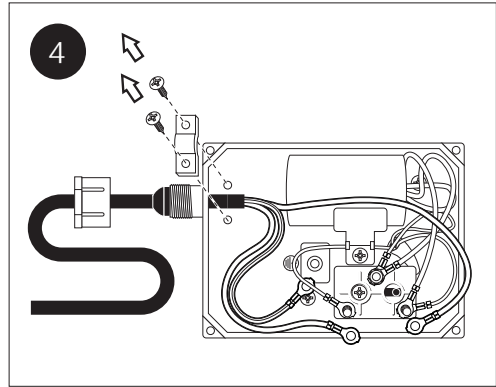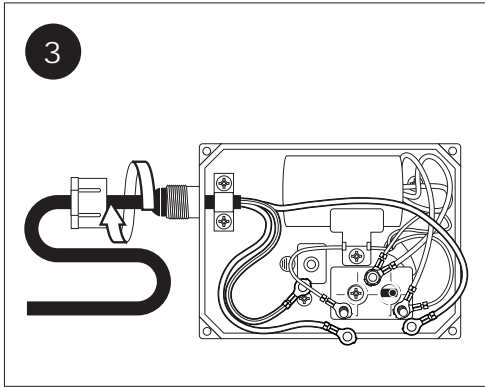

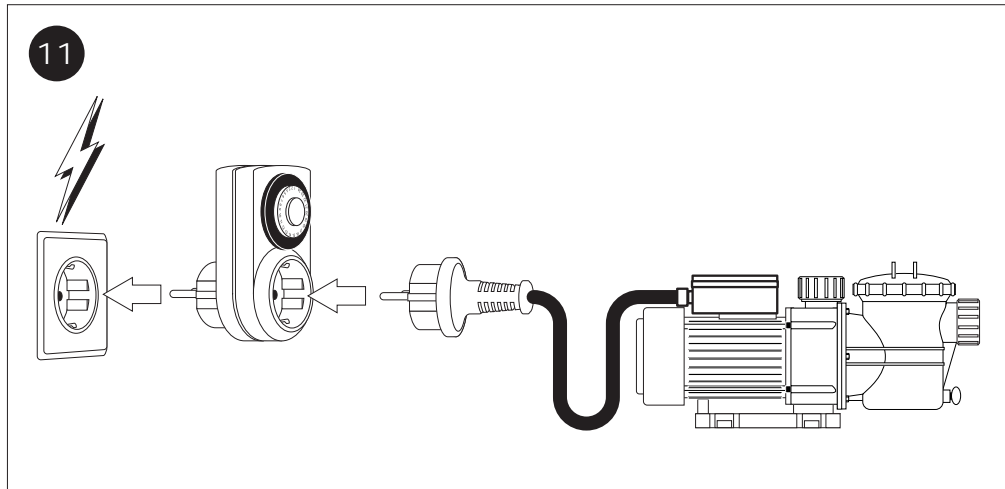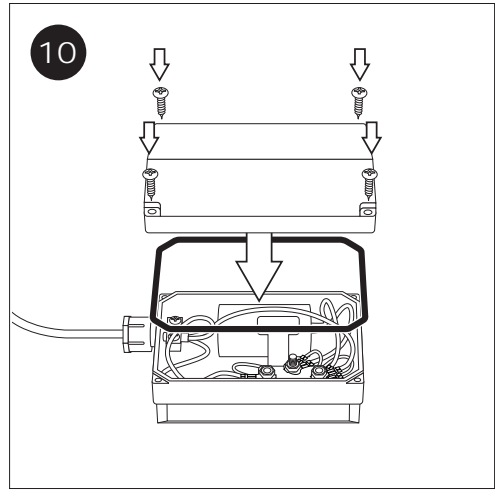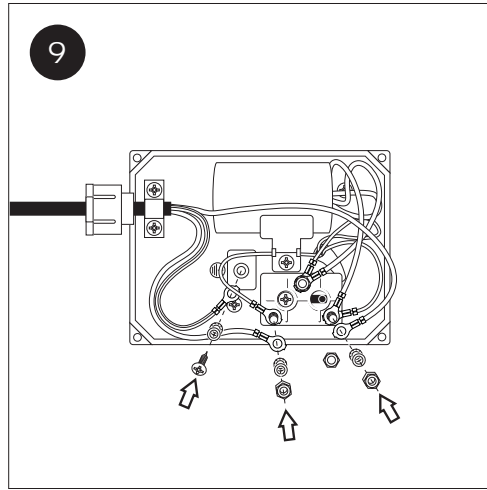



## GB Operating instruction cable set Poolmax TP25/35/50/75/120/150



Ubbink Poolmax TP-pumps are supplied with a plug with earth leakage circuit breaker (FI) as standard. The power supply cable must be replaced for the operation of the pump via the power plug of a time switch clock or a switch box with time switch clock with power plug. Please, read these operating instructions thoroughly and keep them for correct replacement of the power supply cable.

	Cable set Poolmax TP25/35/50	Cable set Poolmax TP75/120/150
Article number	7534149	7534150
Cable length	1.5 m	1,5 m
Cable type	H05RN-F 3*0.75mm <sup>2</sup>	H05RN-F 3*1.00mm <sup>2</sup>
Power plug	Hybrid E&F (HL-28 Rainproof)	Hybrid E&F (HL-28 Rainproof)



### Safety instructions

- The replacement of the power supply cable at the Poolmax TP pump must be carried out exclusively by an approved electrician.
- The cross section dimension of the power supply cable must not be reduced. The cable must be at least of the type H05RN-F 3\*0.75 mm<sup>2</sup> for Poolmax TP25/35/50 and H05RN-F 3\*1.00 mm<sup>2</sup> for Poolmax TP75/TP120/TP150.
- The power supply of the device must be carried out via an earth leakage circuit breaker (FI-switch) with < 30 mA nominal fault current in accordance with the European safety standards.
- Do not cut off the safety plug with earthing from the power supply cable and also do not shorten the power supply cable of the device. The guarantee becomes invalid if this is not observed.
- If the power supply cable or the power plug is damaged, the device must be taken out of operation immediately to avoid any danger.



### Replacement of the power supply cable

- Separate the pump from the power supply
- Open the cover of the control box (Figure 1) on the pump
- Take off the connection of the 3 power supply wires (Figure 2)
- Loosen the inner and outer cable locking fixture (Figures 3 +4)
- Carefully pull out the power supply cable from the cable bushing (Figure 5)
- Insert the power supply cable of the cable set (Figure 6)
- Fasten the inner and outer cable locking fixture (Figures 7 +8)
- Connect the 3-wire power supply cable (Figure 9)
  - Brown/black= Live wire
  - Blue = Neutral wire
  - Green-yellow = Protective wire
- Insert the seal and close the control box with the cover (Figure 10)
- The pump is now ready for operation via time switch clock or switch box with time switch clock.



### Guarantee

The guarantee for your Poolmax TP-pump does not become invalid under the precondition that the replacement of the power supply cable and other maintenance work has been carried out provably by an approved specialist electrical company.



### Correct disposal of this product

This symbol points out inside the EU that this product must not be disposed via domestic waste. Old devices contain valuable materials for recycling, which should be passed on to recycling and not harm the environment or human health due to uncontrolled waste disposal. Please, dispose the old devices therefore via suitable collecting systems or send the device for disposal to the place you bought it from. This will then pass on the device to recycling.





## **NL** Gebruiksaanwijzing kabelset Poolmax TP25/35/50/75/120/150



Ubbink Poolmax TP-pompen worden standaard geleverd met een aardlekschakelaar. Voor het gebruik van de pomp via een netstekker met een tijdschakelklok resp. een schakelkast met tijdschakelklok met netstekker is het nodig de stroomkabels te vervangen. Lees deze gebruiksaanwijzing over het correct vervangen van de stroomkabel aandachtig door. Bewaar de gebruiksaanwijzing zodat u deze altijd bij hand heeft indien nodig.

	Kabelset Poolmax TP25/35/50	Kabelset Poolmax TP75/120/150
Art.-Nr.	7534149	7534150
Kabellengte	1,5 m	1,5 m
Kabeltype	H05RN-F 3*0.75mm2	H05RN-F 3*1.00mm2
Netstekker	Hybride E&F (HL-28 rainproof)	Hybride E&F (HL-28 rainproof)



### Veiligheidstips

- Het vervangen van een stroomkabel van de Poolmax TP pomp mag enkel door een erkende elektromonteur worden uitgevoerd.
- De afmetingen van de dwarsdoorsnede van de stroomkabel mogen niet gewijzigd worden. De kabel moet voor Poolmax TP25/35/50 ten minste van het type H05R—F 3\*0,75 mm2 zijn en voor Poolmax TP75/TP120/TP150 van het type H05RN-F 3\*1,00 mm2.
- In overeenstemming met de Europese veiligheidsvoorschriften dient de stroomvoorziening van het apparaat via een aardlekschakelaar (FI-schakelaar) met < 30mA nominale lekstroom geregeld te worden.
- Snijd nooit de netaardeschakelaar van de stroomvoorzieningskabel af en maak ook het netsnoer van het apparaat niet korter. Wanneer u zich hieraan niet houdt, vervalt de garantie.
- Als de stroomkabel resp. de netstekker beschadigd is, moet het apparaat direct uitgeschakeld worden om mogelijke gevaarlijke situaties te voorkomen.



### Vervangen van de stroomkabel

- Koppel de pomp los van op de stroomvoorziening.
- Maak het deksel van het bedieningskastje op de pomp open (afb. 1)
- Maak de verbinding van de 3 stroomaders los (afb. 2)
- Maak de binnenste en de buitenste kabelvergrensding los (afb. 3+4)
- Trek de stroomkabel voorzichtig uit de kabeldoorvoering (afb. 5)
- Plaats de stroomkabel van de kabelset (afb. 6)
- Maak de binnenste en de buitenste kabelvergrensding vast (afb. 7+8)
- Sluit de 3-aderige stroomkabel aan (afb. 9)  
bruin/zwart= stroomvoerende leiding  
blauw= nulleider  
groen-geel=aardlekschakelaar
- Plaats de pakking en sluit het bedieningskastje af met het deksel (afb. 10)
- De pomp is nu klaar om gebruik te worden met een tijdsklok resp. met een schakelkast met tijdsklok.



### Garantie

De garantie voor uw Poolmax TP pomp blijft gelden op voorwaarde dat de stroomkabels en de overige onderhoudswerkzaamheden aantoonbaar uitgevoerd werden door een erkend elektromonteur.



### Correcte afvalverwerking van dit product

Binnen de EU wijst dit symbool erop, dat dit product niet als huisvuil mag worden weggegooid. Oude apparaten bevatten waardevolle recycleerbare materialen die nog wel eens gebruikt kunnen worden en ook moeten worden gescheiden om het milieu resp. de menselijke gezondheid niet door ongecontroleerde afvalverwerking te schaden. Lever oude apparaten daarom in bij de geschikte verzamelingsystemen of zend het apparaat ter verwerking naar de plaats waar u het hebt gekocht. Daar zal dan worden gezorgd voor een goede verwerking van het apparaat.

