



EVOLine

The most inexpensive air-water heat pump to run for heating pools.

For private pools of up to 80 m³.

This technology makes it possible to extend the swimming season so that pools can be used for longer during the year. Its capacity for extracting energy from air enables it to obtain 5 times more energy that it consumes. It is therefore low on power consumption and high on eco-friendliness.



Heat pump configurator

www.astralpool.com → Calculation tools



Astralpool Toolbox para IOS y Android



PRODUCT DESCRIPTION

- The best value for money heat pump in the market.
- **EVOLine** has been especially designed to make huge energy savings in colder climates.
- The greater the COP, the greater the energy savings, which makes for lower electricity bills. EVOLine pumps have over-dimensioned components, such as the evaporator and the A1 titanium dual coil heat exchanger.
- The electric element in the bottom tray prevents ice from forming on the base of the unit.
- **Free downloadable app** for controlling the heat pump via Wi-Fi.
- Reverse **cycle** defrosting.
- R-410A **refrigerant**.
- Minimum working temperature of air of 0 °C.
- **Heat and cold** regulated to keep a constant temperature.
- ABS **housing** / White
- Digital control; watertight switchboard.
- High and low pressure switch.



We reserve the right to change all or part of the product features and/ or the contents of this document without prior notice.

EVOLine



AIR-WATER HEAT PUMPS FOR OUTDOOR INSTALLATION



TECHNICAL SPECIFICATIONS

MODEL			EVOLine6	EVOLine10	EVOLine13	EVOLine15	EVOLine17	EVOLine20	EVOLine25M	EVOLine25	EVOLine35
CODE			66069-MOD	66070-MOD	66071-MOD	66072-MOD	67405-MOD	66073-MOD	66074M-MOD	66074-MOD	66075-MOD
24 °C AIR T. 26 °C WATER T.	Power	KW	4,8	8,2	9,4	11,6	12,9	17,2	23,5	22,5	33,1
	COP		5	5,1	5,3	5,4	5,1	5,1	6,2	5,4	5,5
15 °C AIR T. 26 °C WATER T.	Power	KW	3,6	6,2	7,1	8,7	9,7	12,9	17,9	16,9	24,8
	COP		3,8	3,8	4	4,1	3,8	3,8	4,8	4,1	4,1
5 °C AIR T. 26 °C WATER T.	Power	KW	2,5	4,2	4,6	5,6	6,6	9,1	9,7	10,8	15,6
	COP		2,7	2,7	2,8	2,9	2,7	2,6	3,6	2,9	2,9
INPUT		KW	1	1,6	1,8	2,1	2,5	3,5	3,7	4,2	6
RATED CAPACITY		A	4,5	7,3	8,2	9,5	11,4	15,9	16,8	7,1	10,1
VOLTAGE		V/Ph/Hz	220-240V/1Ph/50Hz						380V/3Ph/50Hz		
DISPLAY			LED/LCD								
NUMBER OF FANS			1	1	1	1	1	1	1	1	2
SOUND LEVEL		dB(A) (1 m)	50	53	54	54	56	56	56	56	57
WATER CONNECTION		Inches	1-1/2								
MIN. WATER FLOW		m ³ /h	1,3	2,2	2,7	3,6	3,6	4,9	6	6	13
APPROXIMATE POOL VOLUME (for pool with cover)		Max. m ³	12	19	24	30	35	45	66	56	80
		Min. m ³	5	15	17	19	20	27	35	35	52
DIMENSIONS	Length	mm	778	938	1015	1015	1080	1080	1078	1078	1078
	Width		293	360	370	370	416	416	416	416	416
	Height		511	581	621	621	708	708	958	958	1258
WEIGHT	Net	Kg	33	48	55	60	68	91	99	99	120
	Gross		38	56	62	67	80	104	114	114	136


Winter cover included.

TECHNICAL SPECIFICATIONS

MODEL			EVOLine6	EVOLine10	EVOLine13	EVOLine15	EVOLine17	EVOLine20	EVOLine25M	EVOLine25	EVOLine35
VOLTAGE		V/Ph/Hz	220-240V/1Ph/50Hz						380-400V/3Ph/50Hz		
RATED CAPACITY		A	4,5	7,3	8,2	9,5	11,4	15,9	16,8	7,1	10,1
FUSE RATING		A	10	16	16	16	20	25	25	3x16	3x16
POWER CABLE	Max 20 m	mm ²	2x1,5	2x2,5	2x2,5	2x6	2x6	2x6	2x6	3x2,5	3x2,5
	Max 50 m		2x4	2x4	2x6	2x6	2x6	2x6	2x6	3x6	3x6

Maximum operating conditions: minimum outdoor air temperature 0 °C. Maximum pool water temperature 40 °C. Maximum water inlet pressure 3 bar.

Diagram of setup

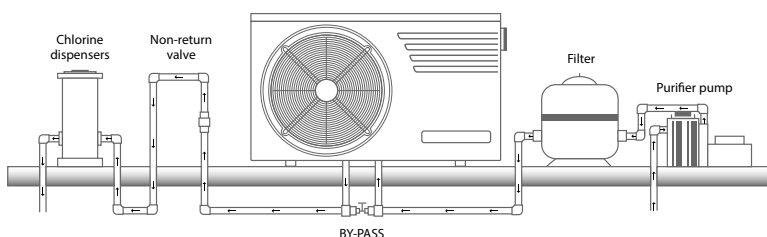

- The heat pump is ready for connection to a general power supply to earth.
- Cable section: This section is a guideline only and must be checked and adapted according to installation requirements and conditions.
- The threshold voltage variation is +/-10% during operation.
- Protect the line with a circuit breaker and a 30 mA residual-current device.
- The air should reach the unit free of obstacles (30 cm min.).
- The air expelled should not be blocked by anything (1.5 m).
- Avoid potential air recirculation.
- Mount the unit on a level base.